



TL-D Standard Colours

TL-D 36W/54-765 1SL/25

TL-D Standard Colors lamps (tube diameter of 26 mm) create atmospheres from warm white to cool daylight. Lamps with moderate efficacy and color rendering.

Product data

General Information		Controls and Dimming	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Dimmable	Yes
Life to 10% Failures (Nom)	10000 h	Approval and Application	
Life to 50% Failures (Nom)	13000 h	Energy Efficiency Label (EEL)	A
Light Technical		Mercury (Hg) Content (Nom)	8.0 mg
Color Code	54-765	Energy Consumption kWh/1000 h	43 kWh
Luminous Flux (Nom)	2500 lm	Product Data	
Color Designation	Cool Daylight	Full product code	692341077032200
Lumen Maintenance 10000 h (Nom)	75 %	Order product name	TL-D 36W/54-765 1SL/25
Lumen Maintenance 2000 h (Nom)	90 %	EAN/UPC - Product	6923410770322
Lumen Maintenance 5000 h (Nom)	80 %	Order code	928048505453
Correlated Color Temperature (Nom)	6200 K	Numerator - Quantity Per Pack	1
Color Rendering Index (Nom)	72	Numerator - Packs per outer box	25
Operating and Electrical		Material Nr. (12NC)	928048505453
Power (Rated) (Nom)	36.0 W	Net Weight (Piece)	0.140 kg
Lamp Current (Nom)	0.440 A	ILCOS Code	FD-36/62/2A-E-G13
Voltage (Nom)	103 V		

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

TL-D Standard Colours


Dimensional drawing




TL-D 36W/54-765

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 36W/54-765 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

Photometric data

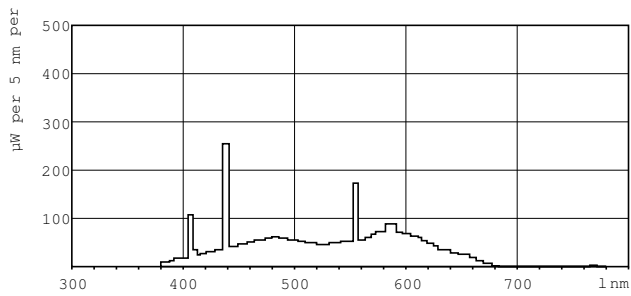


Lightcolor /54-765

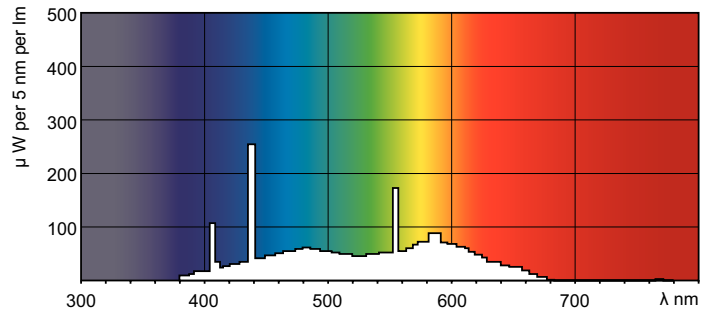


Lightcolor /54-765

Lifetime

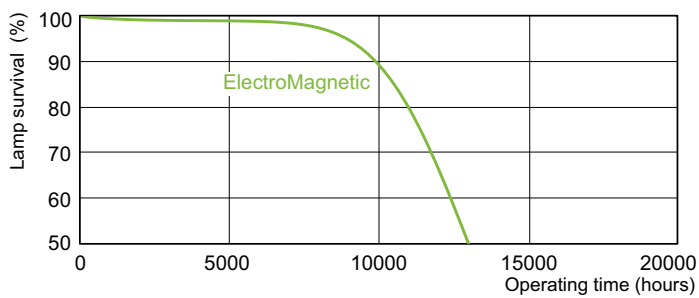


TL-D Standard Colours Life Expectancy 3 h cycle

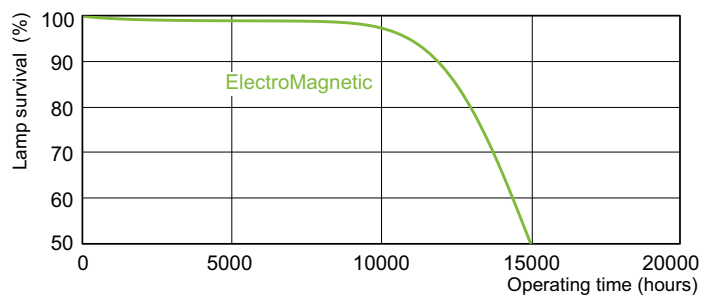

TL-D Standard Colours Life Expectancy 12 h cycle

TL-D Standard Colours

Lifetime

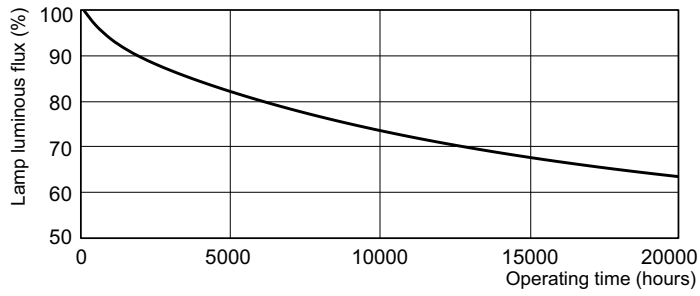

TL-D Standard Colours Lumen Maintenance 3 h + 12 h cycle

